

Attenuators


HFA-##-xxW-3G-N

- ◆ Wide Range of Standard Values
- ◆ Integral Matching Structures
- ◆ High Reliability
- ◆ 5W to 50W Average Power
- ◆ RoHS compliant




	HFA-##-05W -3G-N	HFA-##-10W -3G-N	HFA-##-25W -3G-N	HFA-##-50W -3G-N
Freq. Range (MHz)	0-3000			
VSWR max.	1.2:1	1.25:1	1.2:1	1.2:1
Power Avg/Peak	5W / 500W	10W / 1KW	25W / 1KW	50 / 1KW
Impedance (Ω nom.)	50			
Connector	N male - N female			
Temperature Range (C)	-10~+50°C			
Attenuation (dB) *	03、06、10、20、30			
Accuracy (dB)	3 & 6 ± 0.4	3 & 6 ± 0.4	3 & 6 ± 0.4	3 & 6 ± 0.6
	10 ± 0.5	10 ± 0.5	10 ± 0.5	10 ± 0.5
	15 & 20 ± 0.5	15 & 20 ± 0.6	15 & 20 ± 0.6	15 & 20 ± 0.5
	30 ± 0.7	30 ± 0.6	30 ± 0.6	30 ± 0.6
Weight ,g (lb)	65 (0.14)	135 (0.29)	135 (0.29)	500 (1.1)
Max. Length ,mm (in)	70 (2.8)	83 (3.3)	83 (3.3)	109 (4.3)
Diameter Max. ,mm (in)	20 (0.8)	38 (1.5)	38 (1.5)	64 (2.5)

* : Attenuation Values is ##

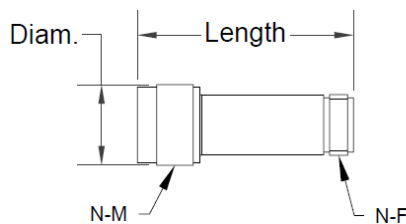

HFA-##-05W-3G-N

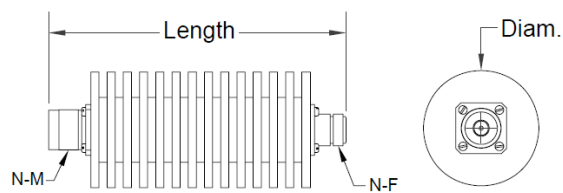

HFA-##-10W (25W&50W) -3G-N