




禾豐開發科技有限公司 HONOVA RESOURCES LTD.

Hybrid Matrices 4x4

HHC-4B6-xF


- ◆ N and 7/16 (DIN) Female Connectors
- ◆ Multiband frequency ranges from LTE 700 MHz, SMR/cellular, PCS, UMTS and 3G band to 2700 MHz
- ◆ Minimal RF insertion loss
- ◆ Very low passive intermodulation (PIM)
- ◆ High reliability
- ◆ Connects 4 inputs to 4 output

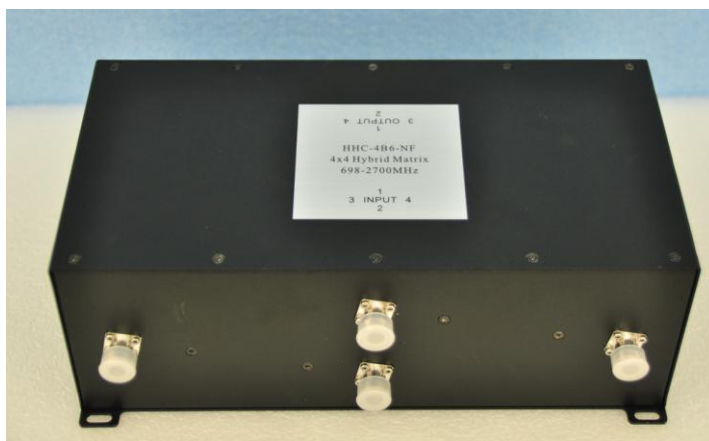


	HHC-4B6-NF	HHC-4B6-DF
Freq. Range (MHz)	698—2700	
VSWR	1.25:1 (max.)	
Coupling (dB)	6.2±0.8	
Power Rating (watts)	100	
Input Isolation (dB min.)	23	
PIM (dBc) *	-150	
Impedance (Ω nom.)	50	
Temperature Range (C)	-35° to +85°	
Relative Humidity (%)	0 to 100	
Applications	Indoor/Outdoor, IP65 rating	
Connectors	N Female	7/16 (DIN) Female
Connector Finish	Inner layer—Silver plate / Outer layer—Cu-Sn-Zn plate	
Housing Finish	Black powder paint	
Weight, g (lb)	4480 (9.88)	5080 (11.2)

* : PIM 3rd order dBc @ 2x 43 dBm

禾豐開發科技有限公司 HONOVA RESOURCES LTD.

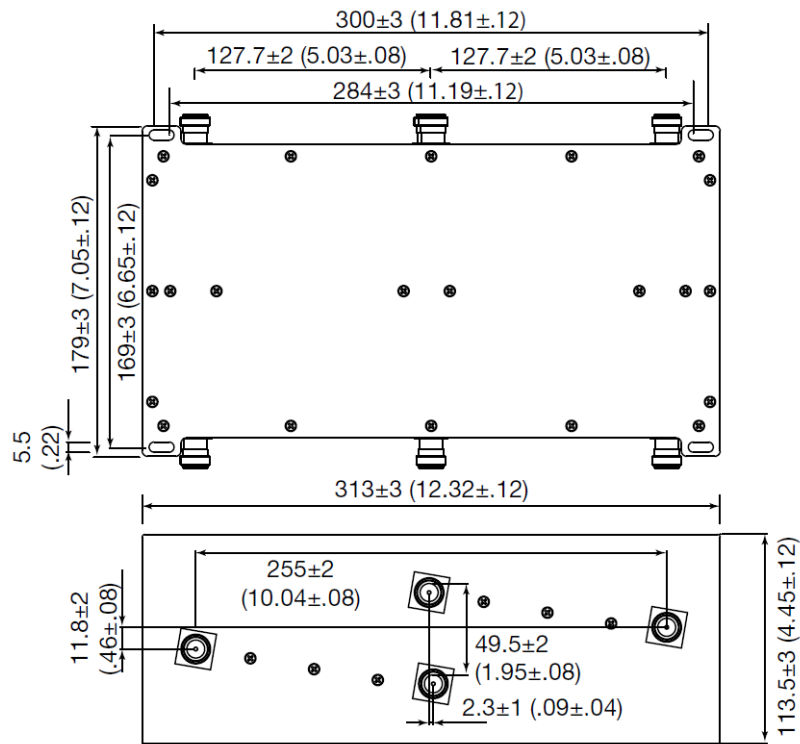

HHC-4B6-NF

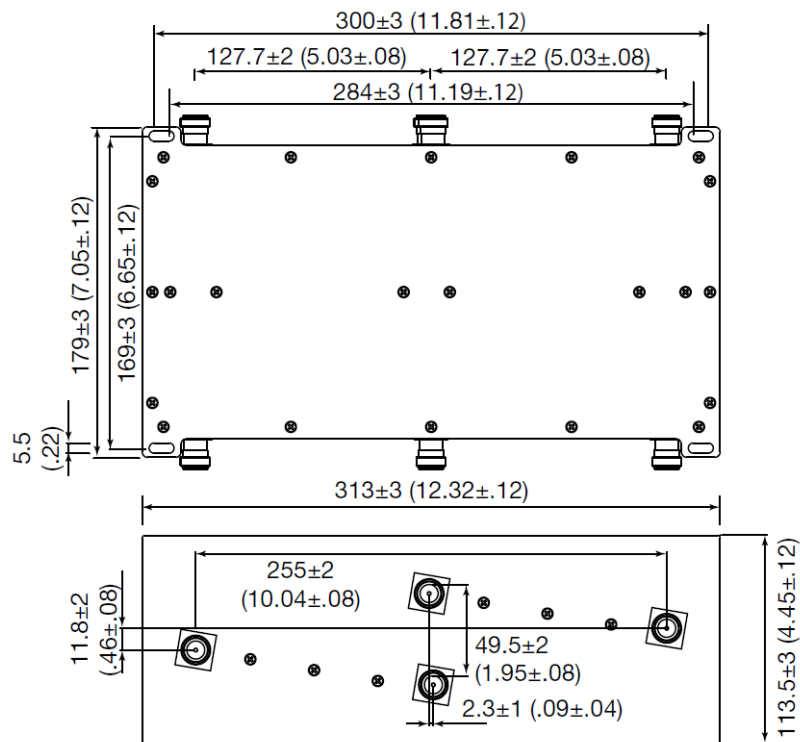

HHC-4B6-DF