

Tappers (Unequal Splitter)

HTP-Cxx-UB-NF

- ◆ N Female Connectors
- ◆ Multiband frequency coverage
- ◆ 500 or 200 watt average main line power
- ◆ Minimal RF insertion loss
- ◆ Very low passive intermodulation (PIM)
- ◆ High reliability
- ◆ Supplied with spring clip accessory for ease of mounting to wall




	HTP-C06-UB-NF	HTP-C10-UB-NF	HTP-C15-UB-NF
Freq. Range (MHz)		698—2700	
VSWR		1.35:1	
Dissipative Loss (dB)	1.7	0.8	0.3
Coupling Loss (dB)	6±1.2 (4:1)	10±1.2 (10:1)	15±1.0 (30:1)
Power Handling (watts)		200	
Max. Reflected Power, Through Port (watts)		200	
PIM (dBc) *		-150	
Impedance (Ω nom.)		50	
Temperature Range (C)		-35° to +85°	
Relative Humidity (%)		0 to 100	
Applications	Indoor / Outdoor, IP65 rating		
Connectors	N Female		
Connector Finish	Inner layer—Silver plate / Outer layer—Cu - Sn - Zn plate		
Housing Finish	Black powder paint		
Weight, g (lb)	350(0.77)	330(0.73)	330(0.73)

* : PIM 3rd order dBc @ 2x 43 dBm



禾豐開發科技有限公司
HONOVA RESOURCES LTD.

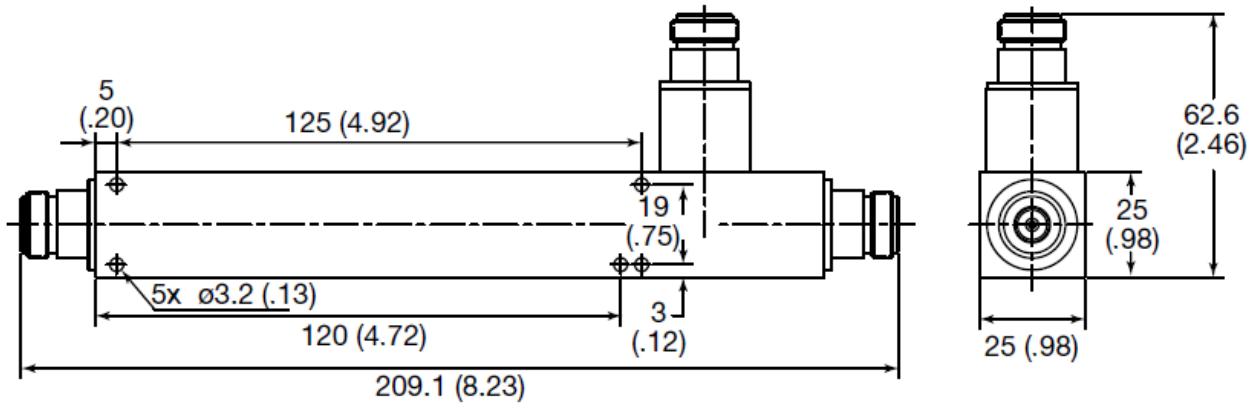

HTP-Cxx-UB-NF

